LG COMMERCIAL LAUNDRY

FRONT LOAD DRYER

· Comprehensive 3year Warranty
· Premium powder coating
· Enhanced Parts

INSTALLATION FLEXIBILITY

Install laundry appliances to meet your needs and your location, with side by side or stacked configurations.

* Parts required for stacking are sold separately or included in all Upper Dryer Models.

Installation Flexibility

EASY PROGRAMMING

Intuitive programming controls allow operators to choose from a variety of functions and programs, including price, cycle time, cycle parameters, spin-speed and more, ensuring that all washing requirements are met.

REVERSIBLE DOOR

Depending on your site or your personal preference, you can make the beset use of space by easily changing the door orientation to open to the left or right
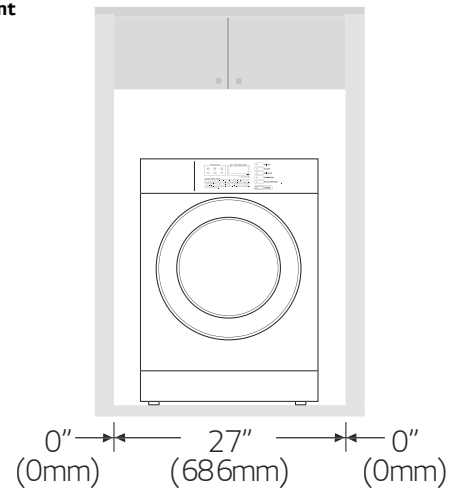
FLOW SENSING

The LED of Flow Sense flashes when the duct is blocked by lint. The manager can know the necessity to check and clean the duct.
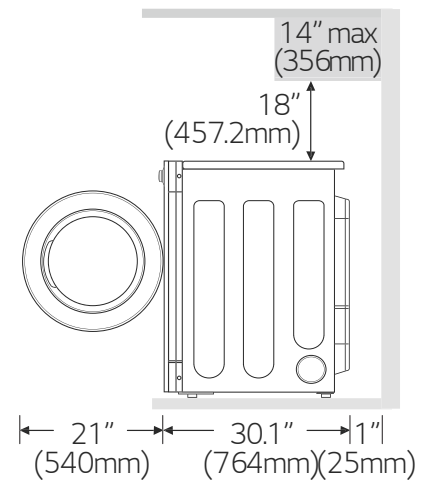
GIANT MAX DRYER SPECIFICATIONS

MODEL		Gas GDL1329*G*	Electric GDL1329*E*
CYLINDER			
Drum Volume	cu.ft (ℓ)	7.3 (207)	7.3 (207)
Diameter	in. (mm)	26.1 (663)	26.1 (663)
Depth	in. (mm)	22.5 (570.6)	22.5 (570.6)
DIMENSIONS			
Product (WxHxD)	in	27 x 38.7 x 30.1	27 x 38.7 x 30.1
	mm	686 x 983 x 764	686 x 983 x 764
With Door Open	in. (mm)	49.8 (1,264)	49.8 (1,264)
Carton (WxHxD)	in	29.9 x 46.1.4 x 31.3	29.9 x 46.1.4 x 31.3
	mm	760 x 1,170x 795	760 x 1,170x 795
Weight (Product/Carton)	lb (kg)	130 (59) / 143 (65)	130 (59) / 143 (65)
RATING			
	V/Hz/A	120 / 60 / 5	240 / 60 / 26 208/ 60 / 23
CONSUMPTION INDEX (PER CYCLE)			
Gas	W	5.81	-
Electricity	W	0.35	4.5~5.4
SYSTEM & CONTROL			
Heating Type		Gas (LNG / LPG)[2]	Electric
Type of Drying		Ventilation	Ventilation
Air Flow	CFM	160	160
Motor	KW	0.3	0.3
Gas Ratings	kW/BTU	5.8/20,000	-
Heating Element	kW	-	5.4
Program Duratin in Minutes (Default)	min	45	45
CONNECTIONS			
Air Outlet Diameter	in. (mm)	4 (100)	4 (100)
Exhaust Airflow Diameter	in. (mm)	4 (100)	4 (100)
PROGRAMS			
Program List		High Temp	High Temp
		Med Temp	Med Temp
		Low Temp	Low Temp
		No Heat	No Heat
EXTERNAL FINISH			
Drum		Alcosta	Alcosta

Front

0"
(0mm) — 27"
(686mm) — 0"
(0mm)

Side

14" max
(356mm)

18"
(457.2mm)

21"
(540mm) — 30.1"
(764mm) — 1"
(25mm)

Stacked Installation

76.9"
(1,954mm)
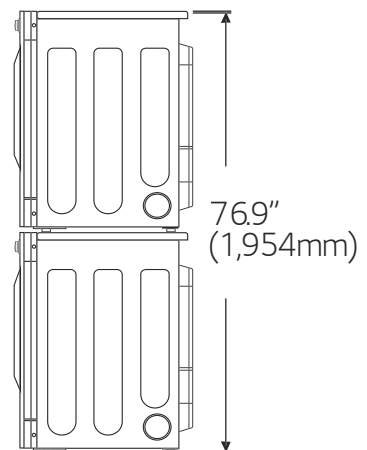
PRODUCT IMAGE

Coin Convertible   *Card / OPL Type*   *Stack Type (Coin, Card/OPL)*